

## Encoders

magnetic Encoder, digital outputs,  
3 channels, 32 - 256 lines per revolution

For combination with  
DC-Micromotors

### Series HEM3-256 W

		HEM3-32 W	HEM3-64 W	HEM3-128 W	HEM3-256 W	
Lines per revolution	$N$	32	64	128	256	
Frequency range, up to <sup>1)</sup>	$f$	16	32	64	128	kHz
Signal output, square wave		2+1 Index				Channels
Supply voltage <sup>2)</sup>	$U_{DD}$	3 ... 3,6				V
Current consumption, typical <sup>3)</sup>	$I_{DD}$	16				mA
Output current, max. <sup>4)</sup>	$I_{OUT}$	2				mA
Pulse width	$P$	180 ± 45				°e
Phase shift, channel A to B	$\Phi$	90 ± 45				°e
Logic state width	$S$	90 ± 45				°e
Signal rise/fall time, max. ( $C_{LOAD} = 50$ pF)	$tr/tf$	0,1 / 0,1				µs
Inertia of sensor magnet	$J$	0,02				gcm <sup>2</sup>
Operating temperature range		-30 ... +85				°C

<sup>1)</sup> Velocity (min<sup>-1</sup>) =  $f$  (Hz) x 60/ $N$

<sup>2)</sup>  $U_{DD} = 3,3$  V: connect Pin 3 and 4 to 3,3 V.  $U_{DD} = 5$  V: connect Pin 3 to 5 V, Pin 4 open

<sup>3)</sup>  $U_{DD} = 3,3$  or 5 V: with unloaded outputs

<sup>4)</sup>  $U_{DD} = 5$  V: low logic level < 0,5 V, high logic level > 4,5 V: CMOS- and TTL compatible

#### For combination with Motor

Dimensional drawing A	<L1 [mm]		
0816 ... SR - K2566	24,4		
Dimensional drawing B	<L1 [mm]		
1016 ... SR - K2566	24,4		
1024 ... SR - K2566	32,4		
Dimensional drawing C	<L1 [mm]		
1224 ... SR - K1707	31,1		

#### Characteristics

These incremental shaft encoders in combination with the FAULHABER DC-Micromotors are designed for indication and control of both shaft velocity and direction of rotation as well as for positioning.

Solid state sensors and a low inertia magnetic disc provide two channels with 90° phase shift and one index channel.

The nominal supply voltage for the encoder is selectable and either 3,3 VDC or 5,0 VDC. The supply voltage for the encoder and the DC-Micromotor as well as the output signals are interfaced with discrete wires and an 8-pin Molex crimp style connector.

Details for the DC-Micromotors and suitable reduction gearheads are on separate catalog pages.



To view our large range of accessory parts, please refer to the "Accessories" chapter.



**Dimensional drawing B**



Example of combination with 1016...SR





**HEM3-256 W**

**Dimensional drawing C**



Example of combination with 1224...SR

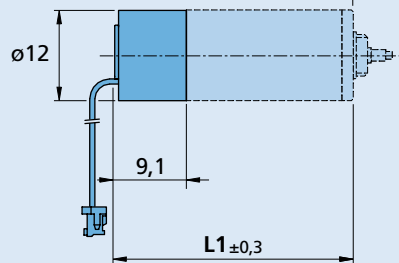

**HEM3-256 W**