

NEW

DC-Micromotors
Precious Metal Commutation

0,92 mNm
2 W

Series 1016 ... SR

Values at 22°C and nominal voltage	1016 K	003 SR	006 SR	009 SR	012 SR		
1 Nominal voltage	U_N		3	6	9	12	V
2 Terminal resistance	R		3,1	12,5	27,1	40,7	Ω
3 Efficiency, max.	η_{max}		76	74	74	75	%
4 No-load speed	n_0		12 700	12 800	13 000	14 100	min ⁻¹
5 No-load current, typ. (with shaft \varnothing 1 mm)	I_0		0,017	0,009	0,007	0,005	A
6 Stall torque	M_H		2,12	2,08	2,11	2,32	mNm
7 Friction torque	M_R		0,037	0,04	0,043	0,042	mNm
8 Speed constant	k_n		4 282	2 175	1 475	1 195	min ⁻¹ /V
9 Back-EMF constant	k_E		0,234	0,46	0,678	0,837	mV/min ⁻¹
10 Torque constant	k_M		2,23	4,39	6,48	7,99	mNm/A
11 Current constant	k_I		0,448	0,228	0,154	0,125	A/mNm
12 Slope of n-M curve	$\Delta n / \Delta M$		5 953	6 166	6 177	6 085	min ⁻¹ /mNm
13 Rotor inductance	L		42	168	363	547	μ H
14 Mechanical time constant	τ_m		8	8	8	8	ms
15 Rotor inertia	J		0,12	0,12	0,12	0,12	gcm ²
16 Angular acceleration	α_{max}		175	171	172	189	$\cdot 10^3$ rad/s ²
17 Thermal resistance	R_{th1} / R_{th2}	17 / 59					K/W
18 Thermal time constant	τ_{w1} / τ_{w2}	5,7 / 176					s
19 Operating temperature range:							
– motor		-30 ... +85					°C
– winding, max. permissible		+85					°C
20 Shaft bearings		sintered bearings					
21 Shaft load max.:							
– with shaft diameter		1					mm
– radial at 3 000 min ⁻¹ (1,5 mm from bearing)		0,9					N
– axial at 3 000 min ⁻¹		0,1					N
– axial at standstill		20					N
22 Shaft play:							
– radial	\leq	0,02					mm
– axial	\leq	0,15					mm
23 Housing material		steel, nickel plated					
24 Mass		6,5					g
25 Direction of rotation		clockwise, viewed from the front face					
26 Speed up to	n_{max}	16 000					min ⁻¹
27 Number of pole pairs		1					
28 Magnet material		NdFeB					

Rated values for continuous operation

29 Rated torque	M_N		0,92	0,9	0,9	0,91	mNm
30 Rated current (thermal limit)	I_N		0,46	0,23	0,16	0,13	A
31 Rated speed	n_N		5 550	5 620	5 850	7 070	min ⁻¹


Note: Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The R_{th2} value has been reduced by 0%.

Note:


The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.

The diagram shows the motor in a completely insulated as well as thermally coupled condition (R_{th2} 50% reduced).

The nominal voltage (U_N) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

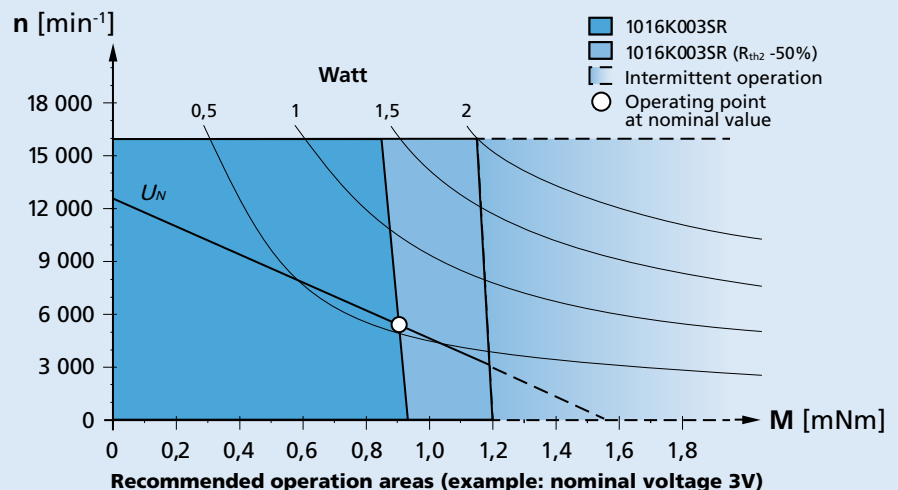

Dimensional drawing

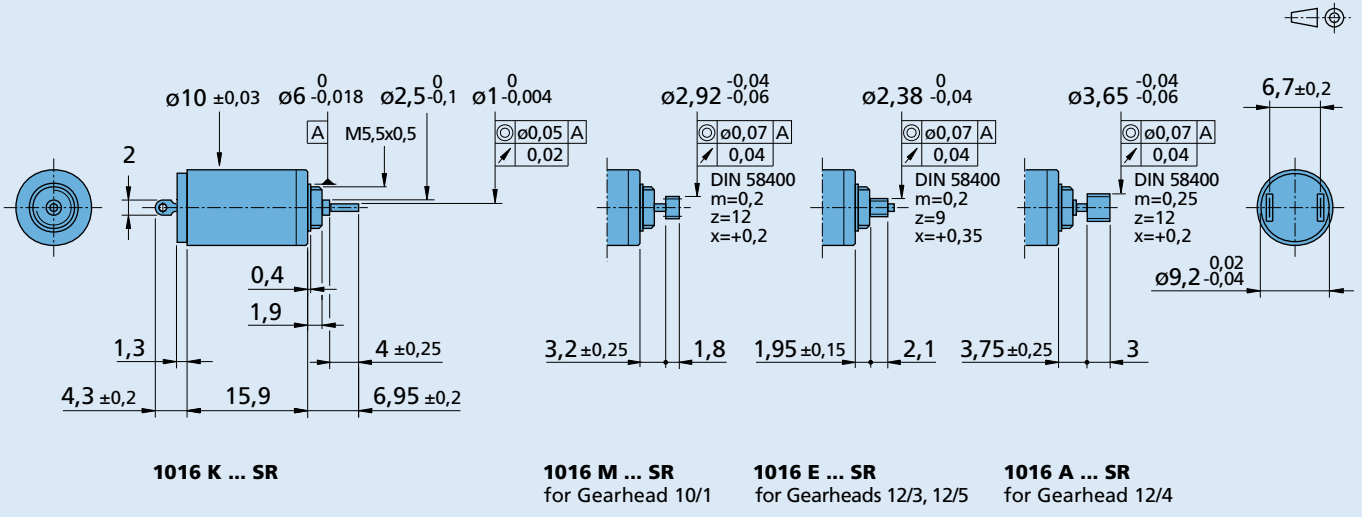

Options

Example product designation: **1016K006SR K2565**

Option	Type	Description
K2565	Encoder combination	Motor with rear end shaft for combination with Encoder PA2-100
K2566	Encoder combination	Motor with rear end shaft for combination with Encoder HEM3
K2567	Bearing	Front ball bearing
K2568	Temperature range	Extended temperature range (-30...+125°C)
K2570	Bearing lubrication	For vacuum of 10^{-5} Pa @ 22°C
K2571	Second shaft end	$\varnothing 1$ mm x 4,5 mm

Product combination

Precision Gearheads / Lead Screws	Encoders	Drive Electronics	Cables / Accessories
10/1 12/3 12/4 12/5	PA2-100 HEM3-256 W	SC 1801 MCDC 3002	To view our large range of accessory parts, please refer to the "Accessories" chapter.

For notes on technical data and lifetime performance refer to "Technical Information".
Edition 2017