

# Motion Controllers

V2.5, 4-Quadrant PWM  
with RS232 or CAN interface

## MCBL 3006 S AES

Values at 22°C	MCBL 3006 S AES		
Power supply electronic	$U_B/U_{EL}$	12 ... 30	V DC
Power supply motor <sup>1)</sup>	$-/U_B$	0 ... 30	V DC
PWM switching frequency	$f_{PWM}$	78,12	kHz
Efficiency electronic	$\eta$	95	%
Max. continuous output current	$I_{cont}$	6	A
Max. peak output current <sup>2)</sup>	$I_{max}$	10	A
Standby current for electronic (at $U_B=24V$ )	$I_{el}$	0,06	A
Operating temperature range		-40 ... +85	°C
Housing material		zinc, black coated	
Mass		160	g

<sup>1)</sup> Only available for option 3085 (separate power supply)

<sup>2)</sup> S2 mode for max. 9s

Interfaces	MCBL 3006 S AES RS	MCBL 3006 S AES CF	MCBL 3006 S AES CO
Interface	RS232	CAN (FAULHABER channel)	CAN (CiA)
Protocol	FAULHABER - ASCII	CANopen	CANopen


### Basic features


- Supported sensor systems:  
absolute encoders AES-4096 / AESM-4096
- Positioning resolution when using absolute encoders as position encoder: 4096 steps per revolution
- Max. 3 digital inputs, max. 1 digital output, 1 analog input.  
Not all I/Os available depending on wiring
- Setpoint specification via fieldbus, quadrature signal, pulse and direction or analog inputs
- Optional stand-alone operation via application programs with the RS232 interface version


### Range of functions

Operating modes (RS and CF Versions)	Position, speed and torque control with setpoint specification via interface or analog. Position control with Gearing Mode or stepper motor operation. Operation as Servo Amplifier in voltage controller mode
Operating modes (CF and CO Versions)	Profile Position Mode (PP), Profile Velocity Mode (PV), Homing Mode.
Speed range for brushless motors with number of pole pairs 1	5 min <sup>-1</sup> ... 30 000 min <sup>-1</sup> (with sinus commutation)
Application programs	Available in versions with RS232 interface
Additional functions	Overload protection for electronics and motor, self-protection from overheating, over-voltage protection in generator mode.
Indicator	Trace as logger
Motor types	Brushless DC-motors with absolute encoders and number of pole pairs 1 or 2

### Dimensional drawing

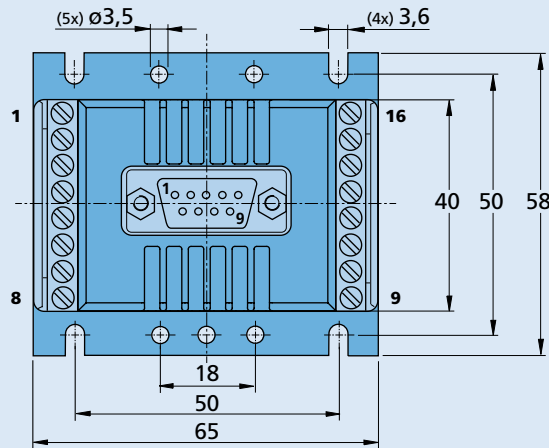

Scale reduced 

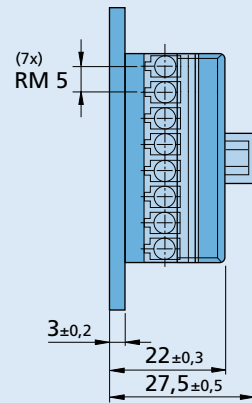

MCBL 3006 S AES

### Options and connection information

Example product designation: **MCBL 3006 S AES RS 3085**

Option	Type	Description	Connection	
3085	Supply	Separate power supply for motor and electronics	<b>No. Function</b>	<b>No. Function</b>
			1 TxD / CAN_H	9 Sensor A / DATA
			2 RxD / CAN_L	10 Sensor B / $\overline{CS}$
			3 AGND	11 Sensor C / CLK
			4 Fault	12 $U_{CC}$
			5 AnIn	13 SGND
			6 $U_B$	14 Motor A
			7 GND	15 Motor B
			8 3. In	16 Motor C
			<b>D-SUB connector</b>	
			<b>RS-232</b>	
			<b>No. Function</b>	<b>CAN</b>
			2 RxD	2 CAN_L
			3 TxD	3 GND
			5 GND	5 -
			7 -	7 CAN_H

**Note:** For details on the connection assignment, see device manual MC.

### Product combination

Brushless DC-Motors	Cables / Accessories
2232 ... BX4 2250 ... BX4 3242 ... BX4 3268 ... BX4	To view our large range of accessory parts, please refer to the „Accessories“ chapter.