

Motion Controllers

V2.5, 4-Quadrant PWM
with RS232 or CAN interface

MCDC 3002 S

Values at 22°C		MCDC 3002 S	
Power supply electronic	U_B/U_{EL}	8 ... 30	V DC
Power supply motor ¹⁾	$-U_B$	0 ... 30	V DC
PWM switching frequency	f_{PWM}	78,12	kHz
Efficiency electronic	η	95	%
Max. continuous output current	I_{cont}	2	A
Max. peak output current ²⁾	I_{max}	3	A
Standby current for electronic (at $U_B=24V$)	I_{el}	0,04	A
Operating temperature range		-25 ... +85	°C
Housing material		Hotmelt	
Mass		16	g

¹⁾ Only available for option 3085 (separate power supply)

²⁾ S2 mode for max. 5s

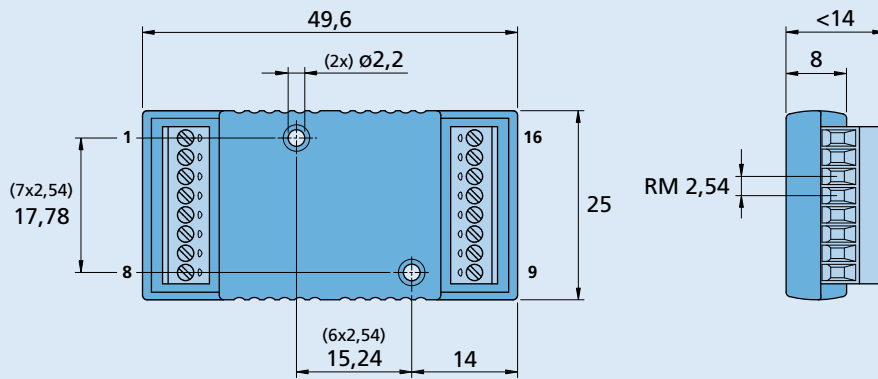
Interfaces	MCDC 3002 S RS	MCDC 3002 S CF	MCDC 3002 S CO
Interface	RS232	CAN (FAULHABER channel)	CAN (CiA)
Protocol	FAULHABER - ASCII	CANopen	CANopen

Basic features

- Operation of brushed DC-Micromotors
- Supported sensor systems: incremental encoders
- Positioning resolution per revolution depending on the used encoder type
- Max. 5 digital inputs, max. 1 digital output, 1 analog input. Not all I/Os available depending on wiring
- Setpoint specification via fieldbus, quadrature signal, pulse and direction or analog inputs
- Optional stand-alone operation via application programs with the RS232 interface version

Range of functions

Operating modes (RS and CF Versions)	Position, speed and torque control with setpoint specification via interface or analog. Position control with Gearing Mode or stepper motor operation. Operation as Servo Amplifier in voltage controller mode
Operating modes (CF and CO Versions)	Profile Position Mode (PP), Profile Velocity Mode (PV), Homing Mode.
Operating modes (CO Version)	Cyclic Synchronous Position Mode (CSP) acc. to IEC 61800-7-201 or IEC 61800-7-301
Speed range	5 min ⁻¹ ... 30 000 min ⁻¹
Application programs	Available in versions with RS232 interface
Additional functions	Overload protection for electronics and motor, self-protection from overheating, over-voltage protection in generator mode.
Indicator	Trace as logger
Motor types	Brushed DC-Micromotors with incremental encoders

Dimensional drawing

MCDC 3002 S
Options and connection information

 Example product designation: **MCDC 3002 S RS 3085**

Option	Type	Description	Connection	
			No. Function	No. Function
3085	Supply	Separate power supply for motor and electronics	1 TxD / CAN_H	9 4. In
			2 RxD / CAN_L	10 Ch A
			3 AGND	11 Ch B
			4 Fault	12 U_{cc}
			5 AnIn	13 SGND
			6 U_B	14 Mot +
			7 GND	15 Mot -
			8 3. In	16 5. In

Note: For details on the connection assignment, see device manual MC.

Product combination

DC-Motors	Cables / Accessories
0615 ... S 0816 ... SR 1016 ... SR 1024 ... SR 1224 ... SR 1319 ... SR 1331 ... SR 1336 ... CXR 1516 ... SR 1524 ... SR 1717 ... SR 1724 ... SR 1727 ... CXR 1741 ... CXR 2224 ... SR 2230 ... S 2232 ... SR 2233 ... S 2237 ... CXR	2342 ... CR 2642 ... CXR To view our large range of accessory parts, please refer to the „Accessories“ chapter.