

Speed Controllers

2-Quadrant PWM configurable via PC

SC 2804 S

Values at 22°C		SC 2804 S	
Power supply electronic	U_P	5 ... 28	V DC
Power supply motor	U_{mot}	0 ... 28	V DC
PWM switching frequency ¹⁾	f_{PWM}	96	kHz
Efficiency electronic	η	95	%
Max. continuous output current	I_{cont}	4	A
Max. peak output current ²⁾	I_{max}	8	A
Standby current for electronic (@ $U_P=24V$)	I_{el}	0,03	A
Operating temperature range		-25 ... +60	°C
Housing material		zinc, black coated	
Mass		160	g

¹⁾ for brushless DC-Motors without Hall sensors: $f_{PWM} = 24$ kHz

²⁾ S2 mode for max. 6s

Interfaces

Configuration of setpoint specifications, operating mode and controller parameters via USB programming adapter for Speed Controller.

Basic features

Speed-controlled operation of:

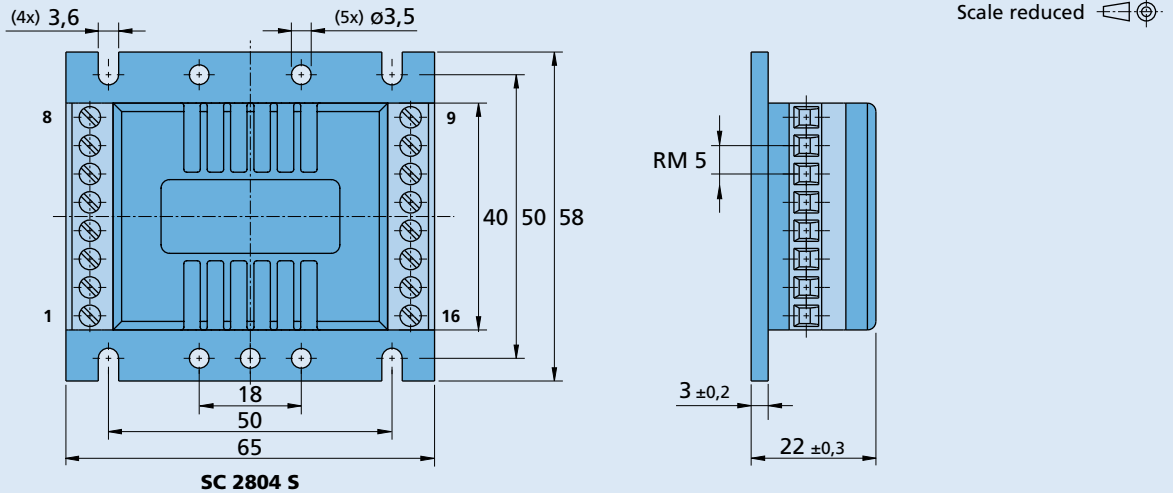
- DC-Micromotors operated with or without incremental encoders
- Brushless DC-Servomotors operated with digital or analog Hall sensors

- Brushless DC-Servomotors operated without Hall sensors (sensorless Operation)
- Brushless DC-Servomotors operated with digital Hall sensors and incremental encoders
- Brushless DC-Servomotors operated with absolute encoders

Note: For version, see options and connection information.

Range of functions

Description	Intermittent operation with up to double the continuous current. Separate voltage supply for motor and electronics. Integrated speed control by means of PI controller. Sensorless operation by evaluating the back electromotive force (EMF). Setpoint input of the speed via PWM or analog voltage value. Switching input for defining the direction of rotation of the motor. Digital output, can be programmed either as frequency output or as error output
Additional functions	Integrated current limitation to protect against thermal overload. Can optionally be operated in voltage controller mode or fixed speed mode.

Dimensional drawing

Options and connection information

 Example product designation: **SC 2804 S 3530**

Option	Type	Description	Connection	
			No. Function	No. Function
4763	BL	Absolute encoder 2 pole motors	1 U_p	9 Mot C
4289	BL	Analog Hall sensors 2 pole motors	2 U_{mot}	10 Mot B
3980	BL	Absolute encoder 4 pole motors	3 GND	11 Mot A
4764	BL	Analog Hall sensors 4 pole motors	4 U_{rsoll}	12 SGND
3530	BL	Digital Hall sensors 2 pole motors	5 DIR	13 V_{cc}
3531	DC	Incremental encoder	6 FG	14 Sens C
4475	BL	Digital Hall sensors + incremental encoder	7 IO 2	15 Sens B
4476	BL	Digital Hall sensors + brake/enable	8 IO 1	16 Sens A
6339	BL	Digital Hall sensors 4 pole motors		
6340	BL	Digital Hall sensors 14 pole motors		

Note: For details on the connection assignment, see device manual SC.

Product combination

DC-Motors	Brushless DC-Motors	Cables / Accessories
1741 ... CXR	0620 ... B	To view our large range of accessory parts, please refer to the „Accessories“ chapter.
2224 ... SR	0824 ... B	
2230 ... S	1028 ... B	
2232 ... SR	1218 ... B	
2233 ... S	1226 ... B	
2237 ... CXR	1628 ... B	
2342 ... CR	2036 ... B	
2642 ... CR	2057 ... B	
2642 ... CXR	2214 ... BXT R	
2657 ... CR	2214 ... BXT H	
2657 ... CXR	2232 ... BX4	
2668 ... CR	2250 ... BX4	
3242 ... CR	2444 ... B	
3257 ... CR	3056 ... B	
3272 ... CR	3216 ... BXT R	
3863 ... CR	3216 ... BXT H	
3890 ... CR	3242 ... BX4	
	3268 ... BX4	
	3564 ... B	