

# Solution details for 2342S036CR

Your comments

---

## Your Requirements

### Motor and Gearhead Preselection (optional)

Motor series	All
Gear series	All

### Global settings

Ambient temperature	22	°C
Available diameter	100	mm
Available length	400	mm
Available supply voltage	24	V

### Advanced settings

Available current	5	A
Efficiency, min.	10	%
RTH2 Reduction		%

### Your entries

Load transmission	Direct rotational	
Required load speed	1.000	1/min
Required load torque	10	mNm


## Results of the Load Calculation

Load current	271,28	mA
Load voltage	9,38	V
Motor winding temperature	41,51	°C
Motor housing temperature	37,73	°C
Required motor torque	10	mNm
Required motor speed	1.000	1/min
Output power	1,05	W
Efficiency (over all)	41,14	%


## Overall Dimensions

Diameter	23	mm
Length	42	mm
Mass	88	g

## Operating Area

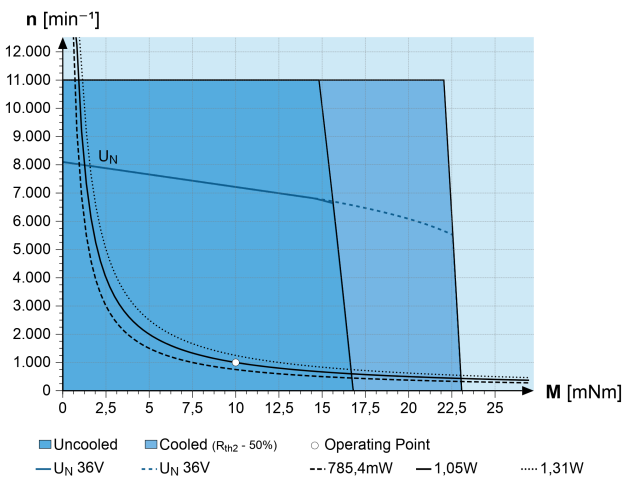

## Characteristic curves

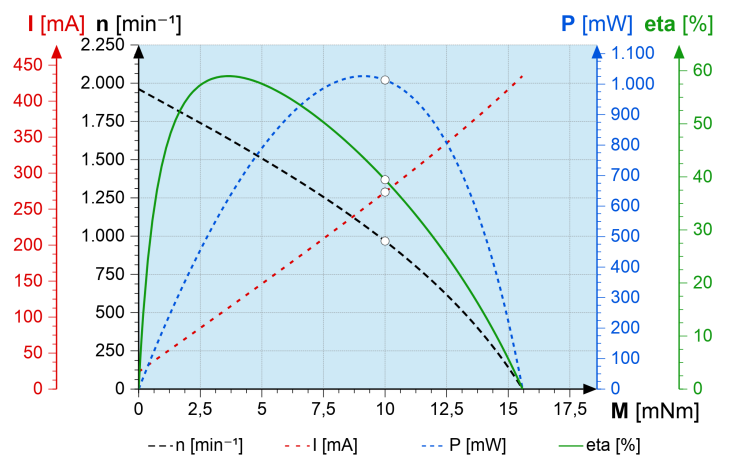

## Motor Characteristic Data

Nominal voltage	$U_N$	36	V
Terminal resistance	R	15,9	$\Omega$
Torque constant	$k_M$	41,4	mNm/A
No load speed	$n_0$	8.100	1/min
Stall torque	$M_H$	91,4	mNm
Speed constant	$k_n$	231	1/min/V
Rotor inductance	L	0,59	mH
Slope of n-M curve	$\Delta n/\Delta M$	88,6	1/min/mNm
Rotor inertia	J	6,5	gcm <sup>2</sup>
Mechanical time constant	$\tau$	6	ms
RTH2 Reduction		30	%
Efficiency max.	$\eta_{max}$	81	%

## Contact

Do you have any questions regarding FAULHABER Products, our Services, or other Drive System related issues?  
Please contact your local representative or fill out our contact form.  
<https://www.faulhaber.com/contact/>

## General Terms and Conditions of Business and Purchase

Our General Terms and Conditions of Business and Purchase you'll find on <https://www.faulhaber.com/gtc>