

## Solution details for

## 2224R036SR + 22/2 308:1

Your comments

---

### Your Requirements

Load transmission	Direct rotational	
Ambient temperature	22	°C
Available diameter	30	mm
Available length	100	mm
Available supply voltage	24	V
Available current	5	A
Efficiency, min.	10	%
Required load speed	10	1/min
Required load torque	0,04	Nm


### Results of the Load Calculation

Load current	10,32	mA
Load voltage	14,95	V
Motor winding temperature	23,66	°C
Motor housing temperature	23,61	°C
Required motor torque	0,23	mNm
Required motor speed	3.079,54	1/min
Output power	41,89	mW
Efficiency (over all)	27,15	%


### Overall Dimensions

Diameter	23,8	mm
Length	59,4	mm
Mass	128	g

### Operating Area

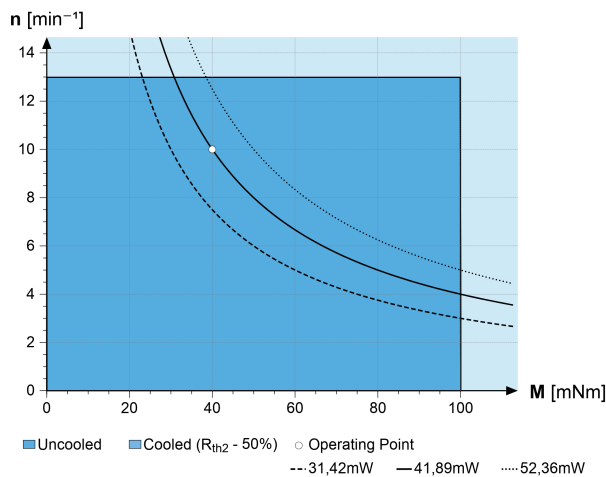

### Characteristic curves

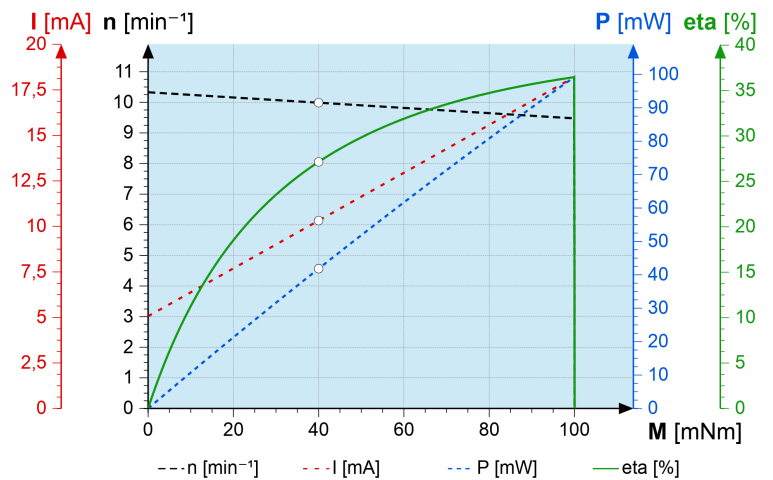

**Motor Characteristic Data**

Nominal voltage	$U_N$	36	V
Terminal resistance	R	91,4	$\Omega$
Torque constant	$k_M$	43,5	mNm/A
No load speed	$n_0$	7.800	1/min
Stall torque	$M_H$	16,9	mNm
Speed constant	$k_n$	219	1/min/V
Rotor inductance	L	1,8	mH
Slope of n-M curve	$\Delta n/\Delta M$	462	1/min/mNm
Rotor inertia	J	2,3	gcm <sup>2</sup>
Mechanical time constant	$\tau$	11	ms
Efficiency max.	$\eta_{max}$	80	%

**Gearhead Characteristic Data**

Housing material	metal		
Geartrain material	metal		
Backlash at no load	3		°
Bearings on output shaft	sintered bearings, ball bearings, preloaded		
Shaft load, max. radial	3		N
Shaft load, max. axial	5		N
Shaft press fit force, max.	50		N
Number of gear stages	6		
Reduction ratio	308		:1
Calculated reduction	307.95375192901		
Continuous torque	100		mNm
Mass	82		g
Efficiency, max.	66		%
Gearshaft diameter	4		mm
Gearhead diameter	23,8		mm

**Contact**

Do you have any questions regarding FAULHABER Products, our Services, or other Drive System related issues?  
 Please contact your local representative or fill out our contact form.  
<https://www.faulhaber.com/contact/>

**General Terms and Conditions of Business and Purchase**

Our General Terms and Conditions of Business and Purchase you'll find on <https://www.faulhaber.com/gtc>