

# DC-Micromotors

## Precious Metal Commutation

0,7 mNm  
1,2 W

### Series 0816 ... SR

| Values at 22°C and nominal voltage                        | 0816 K                  | 003 SR                                      | 006 SR | 009 SR | 012 SR |                                 |
|---|-------------------------|---|--------|--------|--------|---------------------------------|
| 1 Nominal voltage   | $U_N$                   | 3   | 6      | 9      | 12     | V                               |
| 2 Terminal resistance                                     | $R$                     | 5,4   | 21,2   | 47     | 101,8  | $\Omega$                        |
| 3 Efficiency, max.  | $\eta_{max}$            | 69  | 69     | 69     | 67     | %                               |
| 4 No-load speed   | $n_0$                   | 13 250                                      | 13 500 | 13 500 | 12 600 | min <sup>-1</sup>               |
| 5 No-load current, typ. (with shaft $\varnothing$ 1 mm)   | $I_0$                   | 0,016                                       | 0,0083 | 0,0057 | 0,0039 | A                               |
| 6 Stall torque  | $M_H$                   | 1,15  | 1,13   | 1,15   | 1      | mNm                             |
| 7 Friction torque   | $M_R$                   | 0,034                                       | 0,034  | 0,035  | 0,034  | mNm                             |
| 8 Speed constant  | $k_n$                   | 4 526                                       | 2 318  | 1 543  | 1 085  | min <sup>-1</sup> /V            |
| 9 Back-EMF constant                                       | $k_E$                   | 0,221                                       | 0,431  | 0,648  | 0,922  | mV/min <sup>-1</sup>            |
| 10 Torque constant  | $k_M$                   | 2,11  | 4,12   | 6,19   | 8,8    | mNm/A                           |
| 11 Current constant                                       | $k_I$                   | 0,474                                       | 0,243  | 0,162  | 0,114  | A/mNm                           |
| 12 Slope of n-M curve                                     | $\Delta n / \Delta M$   | 11 475                                      | 11 904 | 11 714 | 12 553 | min <sup>-1</sup> /mNm          |
| 13 Rotor inductance                                       | $L$                     | 53  | 217    | 507    | 1 033  | $\mu$ H                         |
| 14 Mechanical time constant                               | $\tau_m$                | 6,1   | 6,5    | 6,2    | 6,5    | ms                              |
| 15 Rotor inertia  | $J$                     | 0,051                                       | 0,052  | 0,051  | 0,049  | gcm <sup>2</sup>                |
| 16 Angular acceleration                                   | $\alpha_{max}$          | 229   | 219    | 227    | 203    | $\cdot 10^3$ rad/s <sup>2</sup> |
| 17 Thermal resistance                                     | $R_{th1} / R_{th2}$     | 20 / 48                                     |        |        |        | K/W                             |
| 18 Thermal time constant                                  | $\tau_{w1} / \tau_{w2}$ | 4,2 / 242                                   |        |        |        | s                               |
| 19 Operating temperature range:                           |                         |   |        |        |        |                                 |
| – motor   |                         | -30 ... +85 (optional version -30 ... +125) |        |        |        | °C                              |
| – winding, max. permissible                               |                         | +85 (optional version +125)                 |        |        |        | °C                              |
| 20 Shaft bearings   |                         | sintered bearings                           |        |        |        |                                 |
| 21 Shaft load max.:                                       |                         |   |        |        |        |                                 |
| – with shaft diameter                                     |                         | 1   |        |        |        | mm                              |
| – radial at 3 000 min <sup>-1</sup> (1,5 mm from bearing) |                         | 0,7   |        |        |        | N                               |
| – axial at 3 000 min <sup>-1</sup>                        |                         | 0,1   |        |        |        | N                               |
| – axial at standstill                                     |                         | 20  |        |        |        | N                               |
| 22 Shaft play:  |                         |   |        |        |        |                                 |
| – radial  | $\leq$                  | 0,02  |        |        |        | mm                              |
| – axial   | $\leq$                  | 0,2   |        |        |        | mm                              |
| 23 Housing material                                       |                         | steel, nickel plated                        |        |        |        |                                 |
| 24 Mass   |                         | 4,5   |        |        |        | g                               |
| 25 Direction of rotation                                  |                         | clockwise, viewed from the front face       |        |        |        |                                 |
| 26 Speed up to  | $n_{max}$               | 16 000                                      |        |        |        | min <sup>-1</sup>               |
| 27 Number of pole pairs                                   |                         | 1   |        |        |        |                                 |
| 28 Magnet material  |                         | NdFeB                                       |        |        |        |                                 |
| <b>Rated values for continuous operation</b>              |                         |   |        |        |        |                                 |
| 29 Rated torque   | $M_N$                   | 0,7   | 0,69   | 0,69   | 0,61   | mNm                             |
| 30 Rated current (thermal limit)                          | $I_N$                   | 0,37  | 0,19   | 0,13   | 0,077  | A                               |
| 31 Rated speed  | $n_N$                   | 2 540                                       | 2 660  | 2 790  | 2 500  | min <sup>-1</sup>               |


**Note:** Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The  $R_{th2}$  value has been reduced by 0%.


**Note:**

The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.

The diagram shows the motor in a completely insulated as well as thermally coupled condition ( $R_{th2}$  50% reduced).

The nominal voltage ( $U_N$ ) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

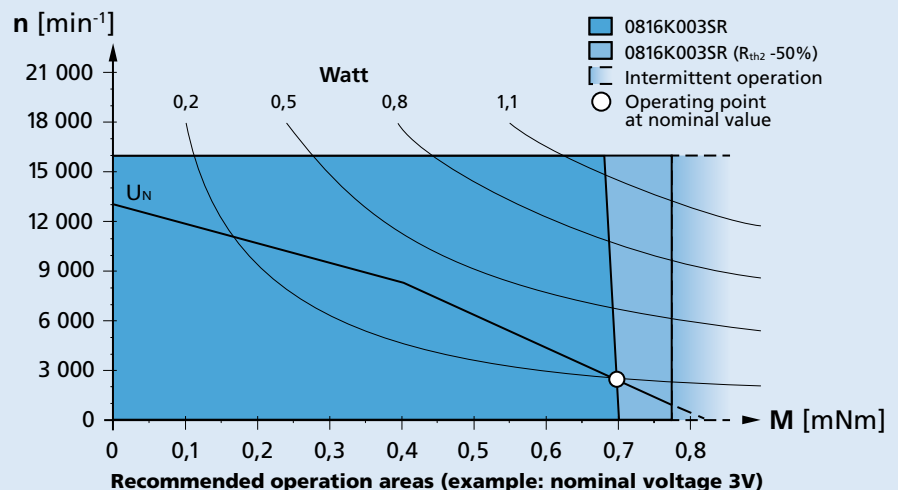

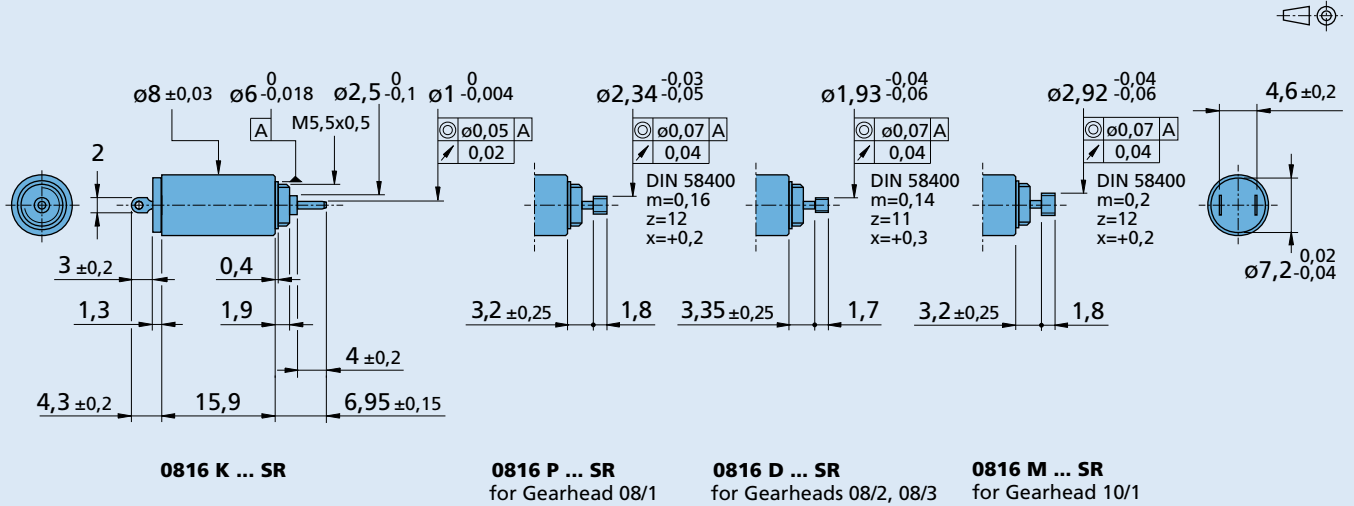**Dimensional drawing**

**Options**

 Example product designation: **0816K012SR-K2565**

| Option | Type                | Description   |
|--------|---------------------|---|
| K2565  | Encoder combination | Motor with rear end shaft for combination with Encoder PA2-50 |
| K2566  | Encoder combination | Motor with rear end shaft for combination with Encoder HEM3   |
| K2567  | Bearing             | Front ball bearing  |
| K2568  | Temperature range   | Extended temperature range (-30...+125°C)                     |
| K2570  | Bearing lubrication | For vacuum of 10 <sup>-5</sup> Pa @ 22°C                      |
| K2571  | Second shaft end    | Ø 1 mm x 4,5 mm   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |
|        |                     |   |

**Product combination**

| Precision Gearheads / Lead Screws | Encoders             | Drive Electronics  | Cables / Accessories   |
|-----------------------------------|----------------------|--|--|
| 08/1<br>08/2<br>08/3<br>10/1      | PA2-50<br>HEM3-256 W | SC 1801 P<br>SC 1801 S<br>MCDC 3002 P<br>MCDC 3002 S<br>MC 3001 B<br>MC 3001 P | To view our large range of accessory parts, please refer to the "Accessories" chapter. |