

Flat DC-Micromotors

Precious Metal Commutation

0,45 mNm
1,2 W

Series 1506 ... SR

| Values at 22°C and nominal voltage | | 1506 N | 003 SR | 006 SR | 012 SR | |
|--|---|-------------------------|---------------------------------------|--------|--------|---------------------------------|
| 1 | Nominal voltage | U_N | 3 | 6 | 12 | V |
| 2 | Terminal resistance | R | 13,5 | 54,7 | 155 | Ω |
| 3 | Efficiency, max. | η_{max} | 62 | 63 | 67 | % |
| 4 | No-load speed | n_0 | 11 100 | 11 800 | 12 800 | min ⁻¹ |
| 5 | No-load current, typ. (with shaft \varnothing 0,8 mm) | I_0 | 0,01 | 0,005 | 0,003 | A |
| 6 | Stall torque | M_H | 0,52 | 0,49 | 0,64 | mNm |
| 7 | Friction torque | M_R | 0,02 | 0,02 | 0,02 | mNm |
| 8 | Speed constant | k_n | 3 884 | 2 053 | 1 107 | min ⁻¹ /V |
| 9 | Back-EMF constant | k_E | 0,257 | 0,487 | 0,903 | mV/min ⁻¹ |
| 10 | Torque constant | k_M | 2,46 | 4,65 | 8,63 | mNm/A |
| 11 | Current constant | k_I | 0,407 | 0,215 | 0,116 | A/mNm |
| 12 | Slope of n-M curve | $\Delta n / \Delta M$ | 21 333 | 24 135 | 19 947 | min ⁻¹ /mNm |
| 13 | Rotor inductance | L | 275 | 1 157 | 3 550 | μ H |
| 14 | Mechanical time constant | τ_m | 17 | 19 | 16 | ms |
| 15 | Rotor inertia | J | 0,08 | 0,08 | 0,08 | gcm ² |
| 16 | Angular acceleration | α_{max} | 68 | 63 | 83 | $\cdot 10^3$ rad/s ² |
| 17 | Thermal resistance | R_{th1} / R_{th2} | 25 / 35 | | | K/W |
| 18 | Thermal time constant | τ_{w1} / τ_{w2} | 4,5 / 48,4 | | | s |
| 19 | Operating temperature range: | | | | | |
| | – motor | | -25 ... +80 | | | °C |
| | – winding, max. permissible | | +85 | | | °C |
| 20 | Shaft bearings | | sintered bearings | | | |
| 21 | Shaft load max.: | | | | | |
| | – with shaft diameter | | 0,8 | | | mm |
| | – radial at 3 000 min ⁻¹ (3 mm from bearing) | | 0,5 | | | N |
| | – axial at 3 000 min ⁻¹ | | 0,1 | | | N |
| | – axial at standstill | | 10 | | | N |
| 22 | Shaft play: | | | | | |
| | – radial | \leq | 0,03 | | | mm |
| | – axial | \leq | 0,2 | | | mm |
| 23 | Housing material | | plastic | | | |
| 24 | Mass | | 4,3 | | | g |
| 25 | Direction of rotation | | clockwise, viewed from the front face | | | |
| 26 | Speed up to | n_{max} | 16 000 | | | min ⁻¹ |
| 27 | Number of pole pairs | | 2 | | | |
| 28 | Magnet material | | NdFeB | | | |
| Rated values for continuous operation | | | | | | |
| 29 | Rated torque | M_N | 0,37 | 0,35 | 0,45 | mNm |
| 30 | Rated current (thermal limit) | I_N | 0,16 | 0,081 | 0,056 | A |
| 31 | Rated speed | n_N | 2 500 | 2 500 | 2 500 | min ⁻¹ |


Note: Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The R_{th2} value has been reduced by 0%.

Note:


The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.

The diagram shows the motor in a completely insulated as well as thermally coupled condition (R_{th2} 50% reduced).

The nominal voltage (U_N) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

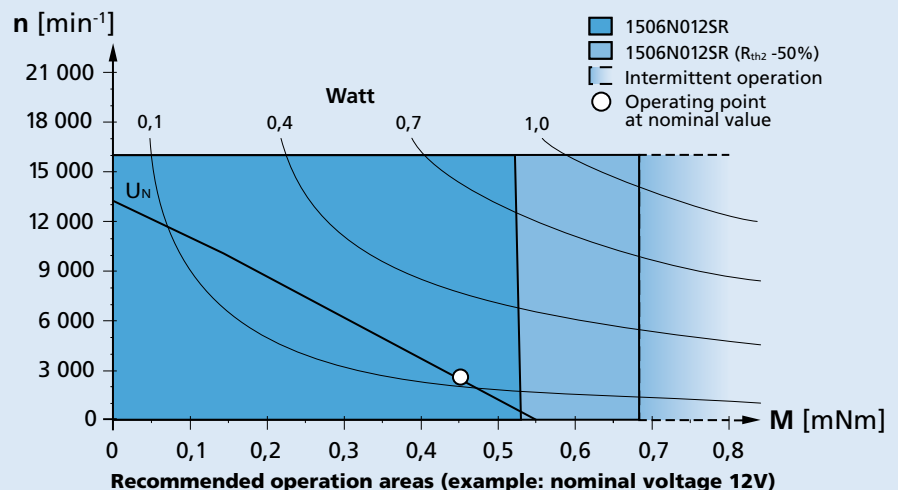

Dimensional drawing

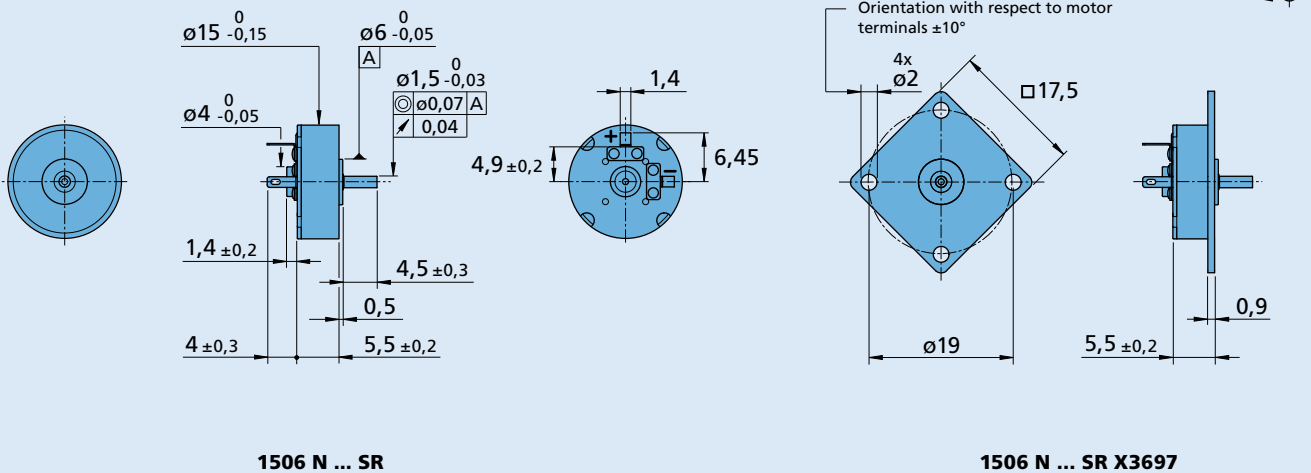

Options

Example product designation: **1506N012SR-3359**

| Option | Type | Description |
|--------|------------------|---|
| 3327 | Twin Leads | For motors with twin leads (PVC), length 70 mm, red (+) / black (-) |
| F | Single Leads | For motors with single leads (PTFE), length 150 mm, red (+) / black (-) |
| X3697 | Flange | Square mounting flange (17,5 x 17,5 mm) |
| 3359 | Second shaft end | Length 4,5 mm |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| Precision Gearheads / Lead Screws | Encoders | Drive Electronics | Cables / Accessories |
|-----------------------------------|----------|------------------------|--|
| | | SC 1801 P SC 1801 S | To view our large range of accessory parts, please refer to the "Accessories" chapter. |