

**NEW**

# Brushless DC-Servomotors

4 Pole Technology

59 mNm

133 W

## Series 2264 ... BP4

Values at 22°C and nominal voltage	2264 W	012 BP4	024 BP4	
1 Nominal voltage	$U_N$	12	24	V
2 Terminal resistance, phase-phase	$R$	0,05	0,22	$\Omega$
3 Efficiency, max.	$\eta_{max}$	91	91	%
4 No-load speed	$n_0$	21 000	21 100	min <sup>-1</sup>
5 No-load current, typ. (with shaft $\varnothing$ 4 mm)	$I_0$	0,521	0,261	A
6 Stall torque	$M_H$	1 311	1 311	mNm
7 Friction torque, static	$C_0$	0,41	0,41	mNm
8 Friction torque, dynamic	$C_V$	$1,15 \cdot 10^{-4}$	$1,15 \cdot 10^{-4}$	mNm/min <sup>-1</sup>
9 Speed constant	$k_n$	1 618	809	min <sup>-1</sup> /V
10 Back-EMF constant	$k_E$	0,618	1,236	mV/min <sup>-1</sup>
11 Torque constant	$k_M$	5,9	11,8	mNm/A
12 Current constant	$k_I$	0,169	0,085	A/mNm
13 Slope of n-M curve	$\Delta n / \Delta M$	14,8	14,8	min <sup>-1</sup> /mNm
14 Terminal inductance, phase-phase	$L$	6	24	$\mu$ H
15 Mechanical time constant	$\tau_m$	1,4	1,4	ms
16 Rotor inertia	$J$	9,2	9,2	gcm <sup>2</sup>
17 Angular acceleration	$\alpha_{max}$	1 424	1 424	$\cdot 10^3$ rad/s <sup>2</sup>
18 Thermal resistance	$R_{th1} / R_{th2}$	1,2 / 12		K/W
19 Thermal time constant	$\tau_{w1} / \tau_{w2}$	7 / 693		s
20 Operating temperature range:				
– motor		-40 ... +125		°C
– winding, max. permissible		+150		°C
21 Shaft bearings		ball bearings, preloaded		
22 Shaft load max.:				
– with shaft diameter		4		mm
– radial at 3 000 min <sup>-1</sup> (3 mm from mounting flange)		20		N
– axial at 3 000 min <sup>-1</sup> (push only)		2		N
– axial at standstill (push only)		20		N
23 Shaft play:				
– radial	$\leq$	0,015		mm
– axial	$=$	0		mm
24 Housing material		stainless steel		
25 Mass		140		g
26 Direction of rotation		electronically reversible		
27 Speed up to	$n_{max}$	34 500		min <sup>-1</sup>
28 Number of pole pairs		2		
29 Hall sensors		digital		
30 Magnet material		NdFeB		
<b>Rated values for continuous operation</b>				
31 Rated torque	$M_N$	59	59	mNm
32 Rated current (thermal limit)	$I_N$	11,9	6	A
33 Rated speed	$n_N$	20 460	20 490	min <sup>-1</sup>


**Note:** Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The  $R_{th2}$  value has been reduced by 50%.

**Note:**


The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.

The diagram shows the motor in a completely insulated as well as thermally coupled condition ( $R_{th2}$  50% reduced).

The nominal voltage ( $U_N$ ) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

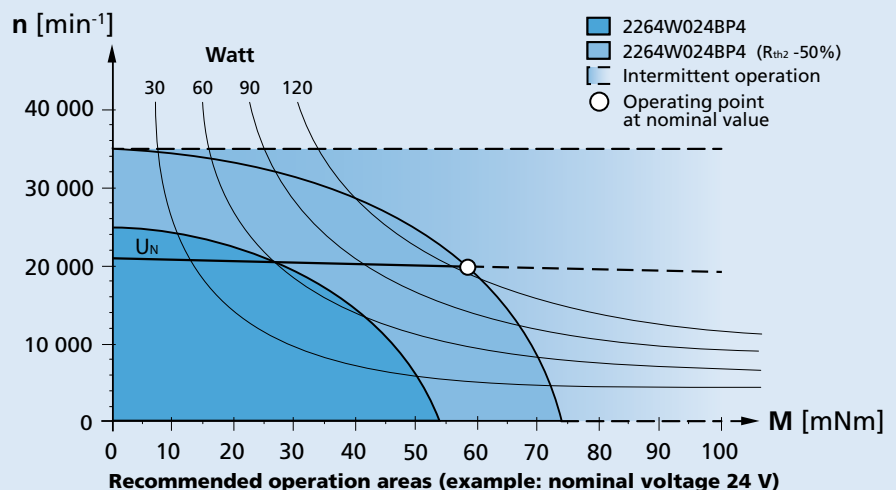

### Dimensional drawing

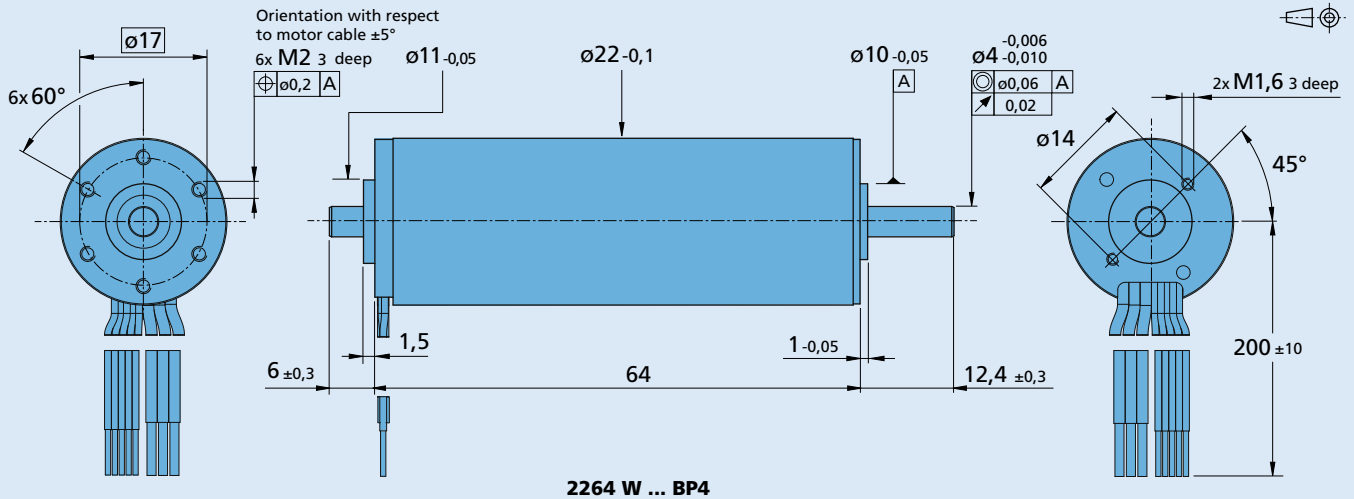

### Option, cable and connection information

Example product designation: **2264W024BP4-3692**

Option	Type	Description	Connection	
Y158	Shaft end	Motor without second shaft end	Function	Colour
3692	Controller combination	Analog Hall sensors for combination with Motion Controller MC 5010	Phase C	yellow
			Phase B	orange
			Phase A	brown
			GND	black
			U <sub>DD</sub> (+5V)	red
			Hall sensor C	grey
			Hall sensor B	blue
			Hall sensor A	green
			<b>Standard cable</b>	
			3 single wires, material PTFE, AWG 20, Phase A/B/C	
			5 single wires, material PTFE, AWG 26, Hall A/B/C, U <sub>DD</sub> , GND	
			<b>Note</b>	
			With the connection cable the terminal resistance is increased typ. by 0,008 Ω.	

### Product combination

Precision Gearheads / Lead Screws	Encoders	Drive Electronics	Cables / Accessories
26/1 R 26/1 S 30/1 S 32A 32ALN 32/3 R 32/3 S BS22-1.5	IE3-1024 IE3-1024 L IERS3-500 IERS3-500 L IER3-10000 IER3-10000 L	SC 5008 MC 5010	To view our large range of accessory parts, please refer to the "Accessories" chapter.