

NEW

Motion Control Systems

V3.0, 4-Quadrant PWM
with EtherCAT interface

160 mNm

140 W

MCS 3274 ... BP4 ET

Values at 22°C and nominal voltage		MCS 3274G024BP4 ..	
Power supply for electronic	U_p	12 ... 50	V DC
Power supply for motor	U_{mot}	0 ... 50	V DC
Nominal voltage for motor	U_N	24	V
No-load speed (at U_N)	n_0	7 400	min ⁻¹
Peak torque (S2 operation for max. 1s)	$M_{max.}$	320	mNm
Torque constant	k_m	28,4	mNm/A
PWM switching frequency	f_{PWM}	100	kHz
Efficiency electronic	η	95	%
Standby current for electronic (at 24V)	I_{el}	0,06	A
Shaft bearings		ball bearings, preloaded	
Shaft load max.:			
– with shaft diameter	5		mm
– radial at 3 000 min ⁻¹ (5 mm from mounting flange)	50		N
– axial at 3 000 min ⁻¹ (push only)	5		N
– axial at standstill (push only)	50		N
Shaft play:			
– radial	≤ 0,015		mm
– axial	= 0		mm
Operating temperature range		– 40 ... + 85 °C	
Speed range (up to 36V)		1 ... 11 600 min ⁻¹	
Housing material		aluminium, stainless steel	
Protection class, with option V ring		IP 54	
Mass		540 g	

Rated values for continuous operation			
Rated torque	M_N	160	mNm
Rated current (thermal limit)	I_N	5,6	A
Rated speed	n_N	6 350	min ⁻¹

Note: Rated values are calculated with nominal voltage and at a 22°C ambient temperature.

Interface	... ET
Configuration from MotionManager 6.0	RS232
Fieldbus	EtherCAT

Range of functions	MCS
Operating modes	PP, PV, PT, CSP, CSV, CST and homing acc. to IEC 61800-7-201 or IEC 61800-7-301 as well as position-, speed- and torque control via analog setpoint or voltage controller
Speed range	see motor diagram
Application programs	Max. 8 application programs (BASIC), one of which is an autostart function
Additional functions	Touch-probe input, connection of a second incremental encoder, control of a holding brake
Indicator	LEDs for displaying the operating state Trace as recorder (scope function) or logger

Note:


The display shows the range of possible operation points of the drives at a given ambient temperature of 22°C.

The diagram indicates the recommended speed in relation to the available torque at the output shaft.


It includes the assembly on a plastic- as well as on a metal flange (assembly method: IM B 5).

The nominal voltage linear slope describes the maximal achievable operating points at nominal voltage.

Any points of operation above this linear slope will require a supply voltage $U_{mot} > U_N$.

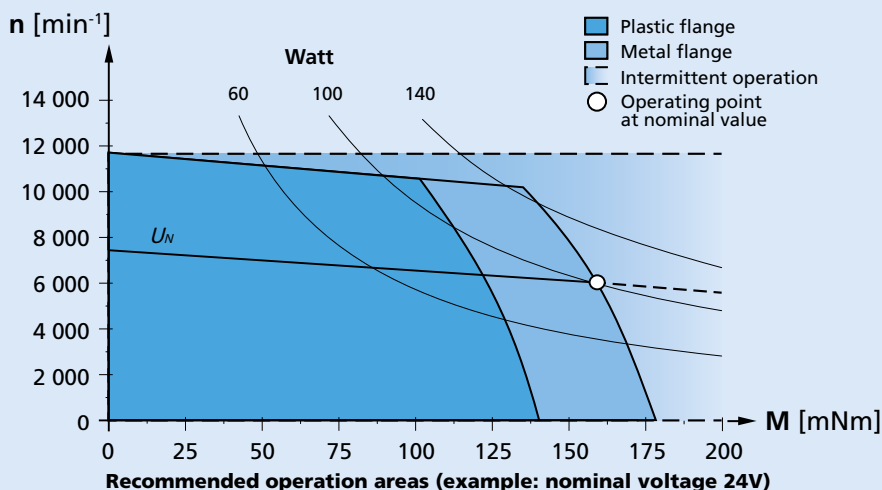

Dimensional drawing

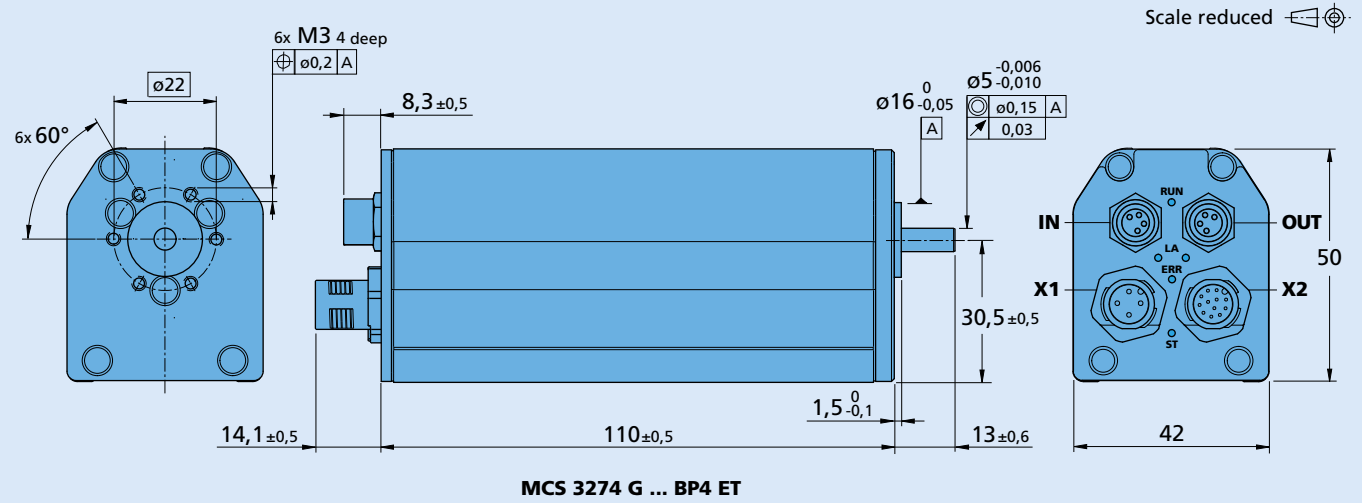

Option, cable and connection information

Example product designation: **MCS3274G024BP4ET-5453**

Option	Type	Description	Connection			
5452	Shaft seal	For use with oil emulsive substances	Name	Function	Inputs-outputs	Description
5453	Shaft seal	IP54 according to IEC 60529	X1	Motor and electronic power supply		
5657	Motor flange seal	IP54 according to IEC 60529	X2	Inputs-outputs	DigIn1, DigIn2, DigIn3 DigOut1, DigOut2 AnIn1, AnIn2 U _{out} / GND	TTL or. PLC level max. 0,7A continuous current $\pm 10V$ against AGND 5V
			IN	Fieldbus		EtherCAT IN
			OUT	Fieldbus		EtherCAT OUT
			Note: For details on the connection assignment, see device manual for the MCS.			

Product Combination

Precision Gearheads / Lead Screws	Encoder	Drive Electronics	Cables / Accessories
32A 32/3 32/3R 32/3S 38A BS32-2.0		Integrated	To view our large range of accessory parts, please refer to the "Accessories" chapter.